



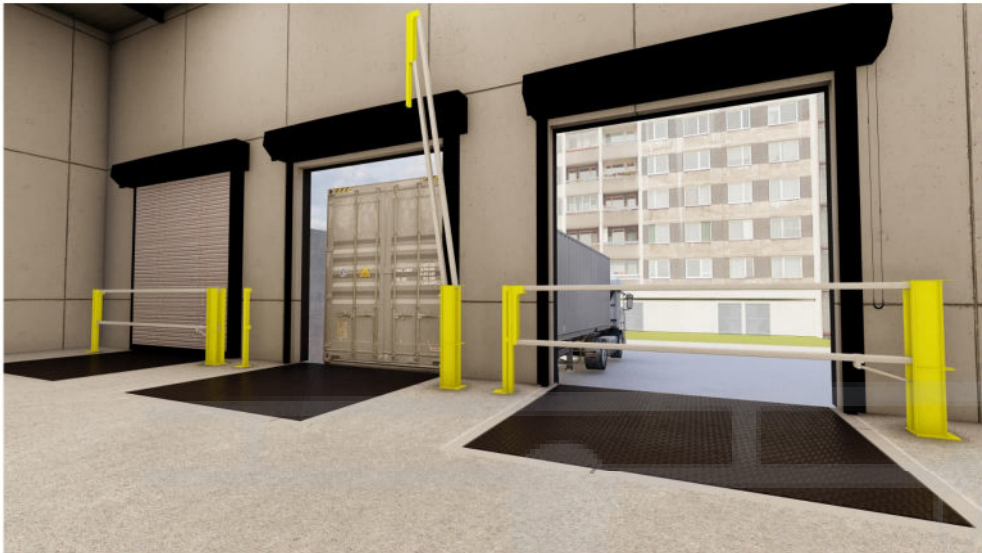

EDGE SINGLE OPENING CANTILEVER LIFT GATE

PROVIDES EFFICIENT AND OSHA-COMPLIANT FALL PROTECTION SOLUTION FOR DOCK DOORS AND ELEVATED WORK AREAS. DESIGNED WITH PNEUMATIC LIFT ASSIST FOR EASY, ONE-HANDED OPERATION, IT HELPS PREVENT FALLS WHILE ENSURING SMOOTH LOADING/UNLOADING ACTIVITIES.

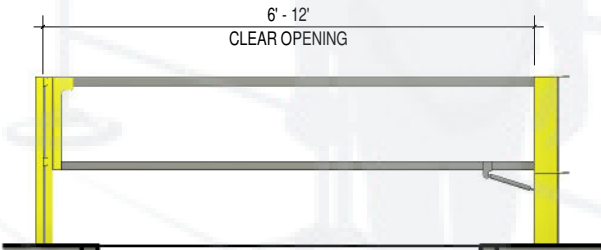

FEATURES

COMPONENT	SPECIFICATION
GATE TYPE	SINGLE CANTILEVER LIFT
CLEAR OPENING WIDTH	6' TO 12' (CUSTOM SIZES ARE AVAILABLE)
NOMINAL OPEN HEIGHT	115" TO 187"(VARIES ON WIDTH)
MATERIAL	ALUMINUM CROSS BARS, STEEL SIDE POST
FINISH	POWDER COATED YELLOW OR GALVANIZED
LOAD RATING	200lb. POINT LOAD (OSHA COMPLAINT)
LOCKING MECHANISM	AUTO LOCKS IN UPRIGHT POSITION
LIFT ASSIST	PNEUMATIC GAS SHOCKS


KEY BENEFITS

- ONE HAND LIFT WITH GAS SHOCKS
- NO OVERHEAD CLEARANCE REQUIRED
- HIGH VISIBILITY FOR ADDED SAFETY
- LIGHTWEIGHT AND STRONG ALUMINUM CONSTRUCTION
- PREVENTS UNAUTHORIZED DOCK ACCESS



EDGE DUAL OPENING CANTILEVER LIFT GATE

PROVIDES EFFICIENT AND OSHA-COMPLIANT FALL PROTECTION SOLUTION FOR DOCK DOORS AND ELEVATED WORK AREAS. DESIGNED WITH PNEUMATIC LIFT ASSIST FOR EASY, TWO-SIDED, CENTER-OPENED OPERATION, IT HELPS PREVENT FALLS WHILE ENSURING SMOOTH LOADING/UNLOADING ACTIVITIES.

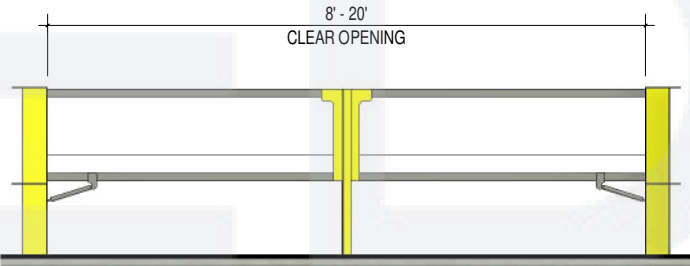


FEATURES

COMPONENT	SPECIFICATION
GATE TYPE	DUAL CANTILEVER LIFT
CLEAR OPENING WIDTH	2' TO 20' (CUSTOM SIZES ARE AVAILABLE)
NOMINAL OPEN HEIGHT	92" TO 164"(VARIES ON WIDTH)
MATERIAL	ALUMINUM CROSS BARS, STEEL SIDE POST
FINISH	POWDER COATED YELLOW OR GALVANIZED
LOAD RATING	200lb. POINT LOAD (OSHA COMPLAINT)
LOCKING MECHANISM	AUTO LOCKS IN UPRIGHT POSITION
LIFT ASSIST	PNEUMATIC GAS SHOCKS


KEY BENEFITS

- TWO SIDED OPENING WITH GAS SHOCKS
- REDUCED OPEN HEIGHT REQUIREMENT
- IDEAL FOR LOW CEILINGS AND WIDE SPANS
- LIGHTWEIGHT AND STRONG ALUMINUM CONSTRUCTION
- HIGHLY VISIBLE AND EASY TO OPERATE

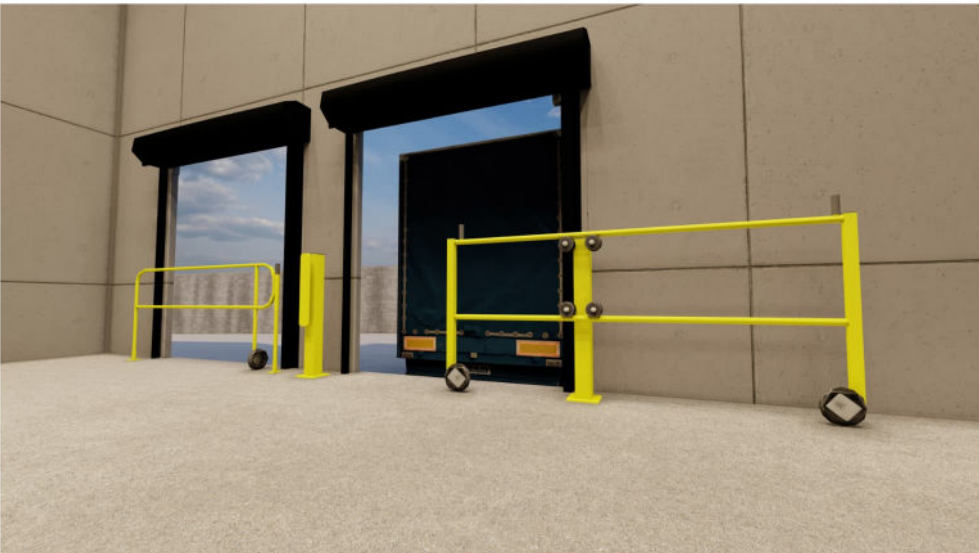

EDGE ROLLER GATE

EDGE ROLLER GATE OFFERS A SPACE-EFFICIENT ALTERNATIVE. DESIGNED TO SLIDE HORIZONTALLY RATHER THAN SWING OPEN, IT ELIMINATES ANY CLEARANCE ISSUES ON THE SHIPPING FLOOR. IDEAL FOR TIGHT DOCK SPACES, IT USES ADJACENT WALL SPACE TO THE RIGHT OR LEFT OF THE DOOR FOR MOVEMENT.

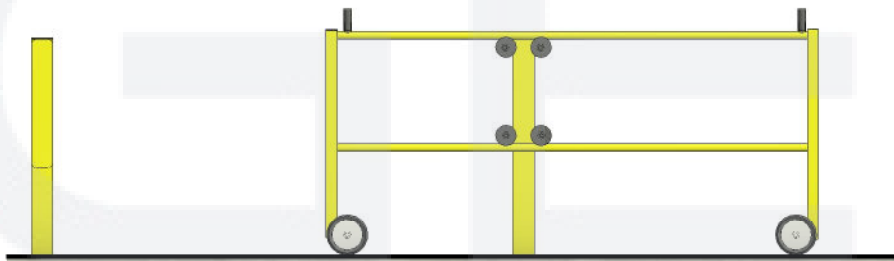

FEATURES

COMPONENT	SPECIFICATION
GATE TYPE	SLIDING ROLLER
OPERATION	MOUNTS TO SLIDE LEFT OR RIGHT
STANDARD SIZES	4' TO 12' (1' INCREMENT); CUSTOM SIZE
MATERIAL	HEAVY DUTY STEEL
FINISH	POWDER COATED YELLOW OR GALVANIZED

KEY BENEFITS

- HEAVY-DUTY CONSTRUCTION FOR DURABILITY
- NO SWING CLEARANCE REQUIRED—IDEAL FOR TIGHT SPACES
- SLIDES SMOOTHLY ON ROLLERS TO THE LEFT OR RIGHT
- MULTIPLE SIZE OPTIONS FROM 4' TO 12' IN 1' INCREMENTS
- CUSTOM SIZING AVAILABLE TO FIT ANY DOCK OPENING

EDGE SWING GATE



FEATURES

COMPONENT	SPECIFICATION
GATE TYPE	SWING GATE
MOUNT OPTION	FREESTANDING OR PERMANENT
STANDARD SIZES	3', 5', 10' CUSTOM SIZES AVAILABLE
SWING DIRECTION	RIGHT OR LEFT MOUNT
FINISH	POWDER COATED YELLOW OR GALVANIZED

KEY BENEFITS

- AVAILABLE IN FREESTANDING OR PERMANENT MOUNT OPTIONS
- CAN BE MOUNTED TO SWING RIGHT OR LEFT
- STANDARD SIZES 3', 5', 10'—PLUS CUSTOM SIZES
- AVAILABLE IN POWDER COAT OR GALVANIZED FINISH

6294 BURRY DR. EDEN PRAIRE, MN 55346

• www.EDGEfallprotection.com • TF No.: 844-314-1374 • SALES@edgefallprotection.com

SIZE: A3	DWG NO: EFP-PS-110-DRG-00	The information contained in this drawing is the sole property of Edge Fall Protection, LLC.	REV. 0 DATE: 07.22.2025
PROJECT NAME: LOADING DOCK GATES			CHECKED: MM
SCALE: 1/4" = 1'-0"			DRAWN: KB
TITLE: PRODUCT SUMMARY			SHEET 00