

PARAPET FOR WALL CLAMP



EDGE Parapet Wall Clamps allow perimeter fall protection railings to be mounted to a parapet wall without the need to mechanically penetrate the wall structure. This clamp-on railing system offers OSHA compliant fall protection without taking up any space on the roof. Railing height is adjustable according to parapet wall height to maintain the OSHA mandated 42" railing height above the walking surface.



USES

The SRC Parapet Wall Clamp system is perfect for guarding parapet walls that are below 42."

Roofs that have irregular or sloping profiles, tight access and hard to reach areas, are all applications ideally suited for the parapet wall clamps. Whether installed permanently or temporarily, this is a great, low cost way to provide OSHA compliant fall protection.

OSHA COMPLIANCE

Compliant with OSHA standards for guardrails: (1910.29 & 1926.502) and CalOSHA Title B, Chapter 4, Article 19, 3212;3209. Independently tested by a nationally accredited engineering lab. Documentation available upon request.

MINIMUM REQUIREMENTS

- Parapet wall must be structurally sound and capable of supporting railings and clamps plus a 200 pound point load prescribed by OSHA.
- Parapet wall must be at least 6" tall and less than 24" wide.

Dimensions

FEATURES

- Available in three size ranges to fit three wall widths: 1"-6," 6"-12," and 12"-24"
- No welding or drilling required for attachment
- Will no harm metal drip edge or roofing membrane
- 100% made in USA
- Cannot be removed without the use of tools
- American Welding Society Certified (AWD D1.1 & D1.3)
- Railings available in powder coat or galvanized finishes
- Custom RAL colors available

WE INSTALL TOO!

Let us do it for you. Call to get a quote for our professional installation services.




844-314-1374 | EDGEfallprotection.com | sales@edgefallprotection.com


PARAPET WALL CLAMP PRODUCT SPECIFICATIONS

Size options


SIDE VIEW
CLAMP



TOP VIEW
CLAMP

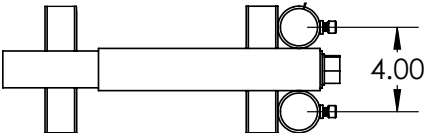

SIDE VIEW
TYPICAL WALL MOUNTED RAILING

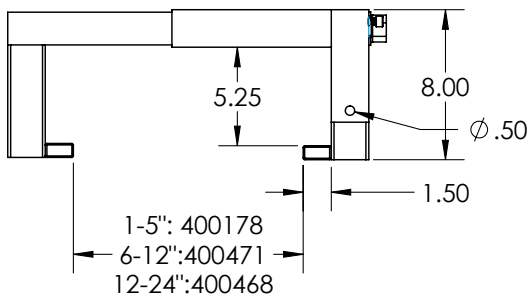

Finish options

1"-6" OPENING



6"-12" OPENING



12"-24" OPENING



SAFETY YELLOW



SAFETY YELLOW +
GALVANIZED



GALVANIZED



CUSTOM COLORS



INSTALLATION

- Attach first clamp where needed
- Place second clamp in approximate position and snug against wall
- Insert railing into clamps and secure with locking set screw, and tighten both clamps securely
- Repeat until completed, estimated time to completion: variable lengths of runs

Project:	
Contractor:	
Date:	

PRODUCT SPECIFICATIONS

- Designed in accordance with OSHA standards (1910.29 & 1926.502)
- Tested for 200 pound (90.7kg) force in any direction
- Rubber pads protect membranes
- Clamp offset will not crush metal flashing
- Railings can be precut to size at factory
- Only requires 6" wall height
- Zinc-plated finish on clamps
- Variety of finish options available



844-314-1374 | EDGEfallprotection.com | sales@edgefallprotection.com