

ENDURALINE WARNING LINES



EnduraLine Mobile is our most robust warning line system for permanent demarcation of hazardous areas. EnduraLine Mobile is a non-penetrating warning line system designed to integrate perfectly with our 360 Mobile Rail system. The minimum OSHA requirement for warning lines is that they be placed 15' feet or more away from a leading edge. Any closer to the leading edge and fall protection railings or other fall protection devices must be provided. EnduraLine Mobile combined with our 360 Mobile Rail Systems answers both requirements and provides a complete, comprehensive OSHA compliant perimeter guarding solution.



When personnel need access to ladders or equipment within 15' of the leading edge install the 360 Mobile Rail system from the 15' mark outward and around the area that needs access. Attach the EnduraLine Mobile Permanent Warning Line System to the 360 Mobile Rail at the 15' mark and continue along the perimeter to the next area that needs access. This configuration offers 100% perimeter protection designed to keep workers away from areas they shouldn't be and protected in areas where they need to be.



FEATURES

- 104 lb. base plate
- 25' stanchion spacing
- Powder Coat Yellow or Galvanized Finish
- Other RAL colors available
- 39" Flag Height per OSHA
- Plastic-coated Galvanized Cable with Aluminum Pennants available in 100' increments
- Use with our permanent warning lines

WE INSTALL TOO!

Let us do it for you. Call to get a quote for our professional installation services.



EDGE
FALL PROTECTION

844-314-1374 | EDGEfallprotection.com | Info@edgefallprotection.com




ENDURALINE CORRUGATED— PERMANENT WARNING LINE SYSTEM

EnduraLine Corrugated Permanent Warning Line Systems have all the same great features of the EnduraLine Mobile Warning Line System except that now EnduraLine Corrugated can be installed on corrugated metal roof panels. This mechanically attached system is screwed down to the metal roof panel with self-sealing screws. Once thought impossible to guard, corrugated roofs can now be brought into full OSHA compliance with a combination of EnduraLine Corrugated Warning Lines and Accu-Fit Railing Systems for Corrugated decks.

Features:

- Screw-down base plate with self-sealing hardware
- 30' stanchion spacing
- Galvanized finish standard
- 39" flag height per OSHA
- Plastic-coated galvanized cable with aluminum pennants available in 100' increments

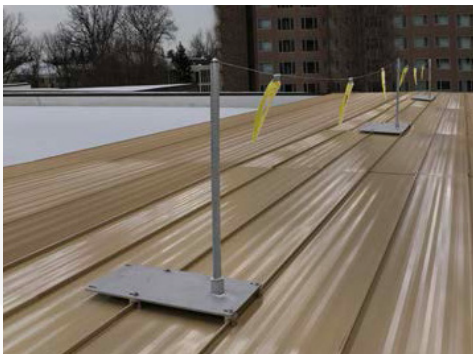

ENDURALINE STANDING SEAM— PERMANENT WARNING LINE SYSTEM

EnduraLine Standing Seam Permanent Warning Line Systems are designed for standing seam metal roof panels. This mechanically attached, non-piercing system is compression-fit to the vertical seams of standing seam metal roofs without puncturing the metal panel itself. Standing Seam roofs can now be brought into full OSHA compliance with a combination of EnduraLine Standing Seam Warning Lines and Accu-Fit Railing Systems for Standing Seam decks.

Features:

- Clamp-on base plate with non-piercing attachment
- 30' stanchion spacing
- Galvanized finish standard
- 39" flag height per OSHA
- Plastic-coated galvanized cable with aluminum pennants available in 100' increments



ENDURALINE R-PANEL— PERMANENT WARNING LINE SYSTEM

EnduraLine R-Panel Permanent Warning Line Systems are designed for R-Panel metal roof panels. This mechanically attached system is screwed down to the metal roof panel with self-sealing screws. R-panel roofs can now be brought into full OSHA compliance with a combination of EnduraLine R-Panel Warning Lines and Accu-Fit Railing Systems for R-Panel decks.

Features:

- Screw-down base plate with self-sealing hardware
- 30' stanchion spacing
- Galvanized finish standard
- 39" flag height per OSHA
- Plastic-coated galvanized cable with aluminum pennants available in 100' increments

