

TETHER TRACK FOLD AWAY



EDGE Fall Protection's Tether Track Fold Away System provides convenient overhead fall arrest safety when extended, and space when the system is not in use. This tether track fall protection system works well for facilities needing a fall arrest solution that folds up and out of the way. Ideal for areas where workers need overhead fall protection under overhead cranes, where facilities have limited floor space, when infrequent fall protection is needed, or when maintenance occurs in narrow bays without workable ceilings.


RIGID TRACK

This Tether Track Fold Away System provides workers with a fixed path of rigid track fall protection when the arms are fully extended. Standard arm reach distances span up to 30'. There are unlimited track lengths with up to 50' between supports.

The enclosed track design, engineered for easy movement, allows the trolley to move smoothly and remain centered directly over your worker. This enclosed track design decreases the possibility of dirt and dust settling on the rolling surface of the cold-rolled steel track. The 2-degree

taper of the track keeps the trolley centered. Tracks can accommodate one or more workers. A dual bypassing track allows workers to safely pass each other without disconnecting. You have the option of single, dual, or multiple tracks for one, two, or multiple workers.

Units can be finished in stainless steel, galvanized steel, or special finishes are available for your application requirements. When the overhead fall protection system is not in use, the track and arms can be folded against their support columns. It easily folds away for fall protection that will not interfere with overhead cranes.

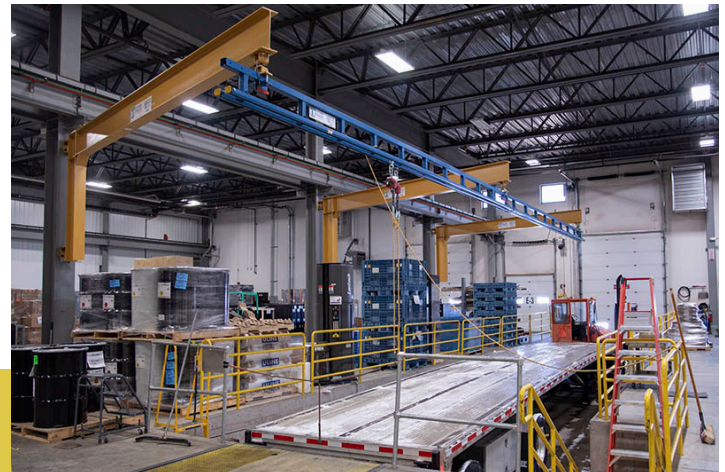

FEATURES

- Maintain productivity without compromise of your worker's safety by deploying this rigid rail fall arrest fold away system when you need it; fold it back when you're done
- Trussed track can accommodate single or multiple workers, dual bypassing track allows workers to safely pass each other without disconnecting
- Unlimited track lengths with up to 50' between supports
- Arm lengths up to 30'
- Available in wall/column mounted or free standing designs
- Wall cantilever or wall bracket configurations are available based on headroom constraints
- Multi-position friction brake or motorized rotation available
- Anchor Trolley comes standard
- Can accommodate 310 lbs with tools when used with 900 lbs Maximum Arresting Force (MAF) energy absorbing lanyards, properly rated full-body harness and connecting device.
- Designed to meet the OSHA 1926 Subpart M Construction standard, ANSI Z359 Fall Protection Code, and NIOSH guidelines



WALL MOUNT, COLUMN MOUNT, OR FREE STANDING DESIGN

Choose from wall/column mount or free standing designs. This overhead fall protection system is also available in wall cantilever or wall bracket configurations, depending on headroom constraints.

- **Standard Wall Mount System Includes:** Arm(s), Tether Track, Tether Trolley(s) and all necessary mounting hardware.
- **Free Standing System Includes:** Arm(s), Tether Track, Tether Trolley(s), free standing mast assembly and all necessary mounting hardware.

A multi-position infinitely variable friction brake for system positioning or motorized rotation is available.

DESIGNED TO PROVIDE PROTECTION FOR WORKERS

Tether Track Fall Protection Systems are designed for workers up to 310 lbs with tools when used with 900 lbs Maximum Arresting Force (MAF) energy absorbing lanyards, properly rated full body harnesses and a connecting device.

When used with a retractable lifeline and full body harness, users can travel up to 30 degrees off-center of the track. Single or multiple workers can easily bypass each other without disconnecting when using the dual bypass track.



TURNKEY INSTALLATION BY EDGE FP

While we are always happy to provide detailed installation instructions so you can get the job done in house, EDGE FP also offers turnkey installations on all of our systems. If you want to leave the details and concerns of proper setup, we'd be happy to send our team of professional installers directly to your job site or facility. We are ready to work anywhere in the USA!

OSHA AND ANSI COMPLIANCE

If your workers work at heights of four feet or more in general industry, fall protection is needed. But sometimes passive fall restraint is not practical for your application. Our Tether Track Fold Away rigid rail fall arrest system provides fall protection and safety when your workers need it and space when the system is not in use. This overhead fall protection system is designed by qualified engineers to meet the OSHA 1926 Subpart M Construction Standard, ANSI Z359 Fall Protection Code, and NIOSH guidelines.



EDGE
FALL PROTECTION

844-314-1374 | EDGEfallprotection.com | Info@edgefallprotection.com